


RCAB Elastomeric insulating bushing boot for bushings up to 17.5 kV

Features

- Tool free application
- High-performance insulation material
- Excellent track and erosion resistance
- Removable and reinstallable

Benefits

- Simple and easy installation
- Unlimited shelf life
- Connection can be energised immediately after installation
- One product for inline and right angle application

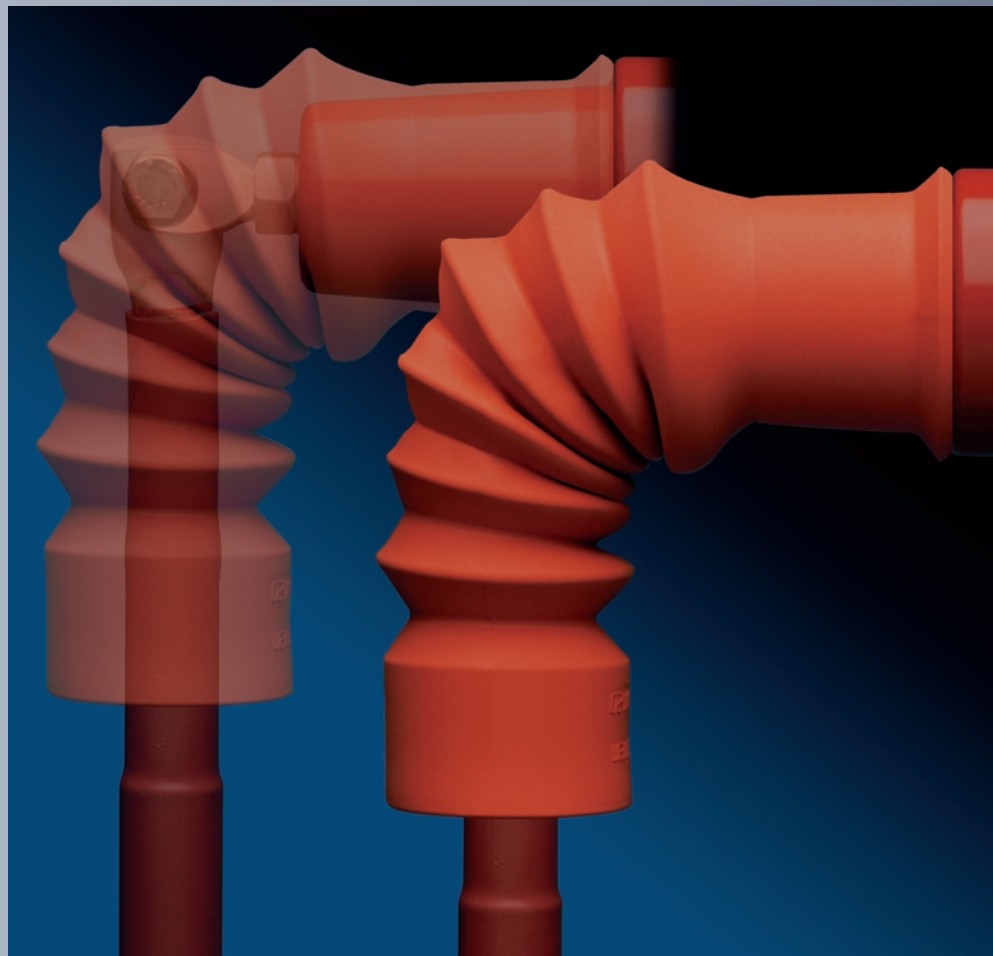

Raychem elastomeric insulating boots are moulded parts which fit over the connection between the cable lug and the inline or right-angled equipment bushing to improve phase-to-phase and phase-to-ground insulation. They are used in switchgear and transformer cable boxes where the air clearances are insufficient for normal operation, or to protect against flashover due to rodents or high humidity.

The non-tracking elastomeric housing has excellent erosion resistance, dielectric properties and environmental resistance, giving superb performance in areas of high humidity and electrical stress.

RCAB boots works in combination with all Raychem termination product lines including both elastomeric and traditional heatshrink technology.

RCAB boots are quick and easy to install and do not require any taping of the bushing or the termination. The boot can easily be removed and reinstalled without the need for additional material or tooling, allowing access to the bushing connection for test purposes.

The universal screw EXRM-1366 is available on request.




Universal screw
EXRM-1366

Technical data

	RCAB 4110	RCAB 4120
Maximum system voltage	17.5 kV	17.5 kV
Basic impulse level	95 kV	95 kV
Collar size	No.1	none
Bushing diameter	31 - 45 mm	46 - 70 mm
Bushing types: to DIN, CENELEC, ANSI	—	400/630 A
Cable cross section	35 - 400 mm ²	35 - 400 mm ²

RCAB family

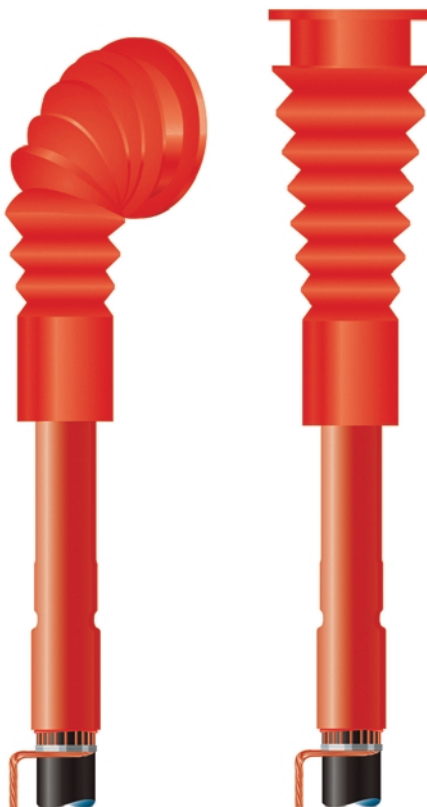

RCAB right angle or inline
application up to 17.5 kV



Collar for smaller
bushing
diameters

Ordering Information

RCAB-4110
RCAB-4120

Each kit contains elastomeric insulating boots, collars (if required) for three phases and installation instructions.

Related Product Information

Test report PPR 1336



All of the above information, including drawings, illustrations and graphic designs, reflects our present understanding and is to the best of our knowledge and belief correct and reliable. Users, however, should independently evaluate the suitability of each product for the desired application. Under no circumstances does this constitute an assurance of any particular quality or performance. Such an assurance is only provided in the context of our product specifications or explicit contractual arrangements. Our liability for these products is set forth in our standard terms and conditions of sale.

ALR, AMP, AXICOM, B&H, Bowthorpe EMP, Critchley, Dorman Smith, Dulmison, Hellstern, La Prairie, Morlynn, Raychem, SIMEL and SUCOFIT are trademarks.

tyco

Electronics

Energy Division

AMP AXICOM B&H Bowthorpe EMP CRITCHLEY DORMAN SMITH
Dulmison Hellstern MORLYNN INSULATORS Raychem SIMEL SUCOFIT

Argentina
Phone: ++54-11-4733 2277
Fax: ++54-11-4733 2267

Australia
Phone: ++61-2-4390 1111
Fax: ++61-2-4353 2497

Brazil
Phone: ++55-11-3611 1862
Fax: ++55-11-3611 2457

Canada
Phone: ++1-905-475 6222
Fax: ++1-905-470-4453

France
Phone: ++33-3-80583200
Fax: ++33-3-80341015

Mexico
Phone: ++52-5-729 0405
Fax: ++52-5-361-8545

Thailand
Phone: ++66-2-7394026 - 32
Fax: ++66-2-3260563 - 64

United States of America
Phone: ++1-800-327-6996
Fax: ++1-800-527-8350

United Kingdom
Phone: ++44-1772-325400
Fax: ++44-1772-726276

**Tyco Electronics Raychem GmbH
Energy Division**

Haidgraben 6, 85521 Ottobrunn/Munich, Germany

Phone: ++49-89-6089-0, Fax: ++49-89-6096345

<http://energy.tycoelectronics.com>